



TYGER ACCESS

TG-AS2T24010

Scan to Download the Latest Digital Version



BEFORE INSTALLATION

READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION. REMOVE CONTENTS FROM BOX AND VERIFY ALL PARTS ARE PRESENT. FAILURE TO IDENTIFY DAMAGE BEFORE INSTALLATION COULD LEAD TO A REJECTION OF ANY CLAIM. IF MISSING PARTS OR ANY DAMAGE FOUND, PLEASE TAKE A PICTURE FOR THE CLAIM PURPOSE. TO FILE YOUR CLAIM, PLEASE VISIT: WWW.TYGERAUTO.COM/CONTACT

TORQUE VALUES


Fastener Size	Class 8.8 Torque (ft-lbs)	Class 10.9 Torque (ft-lbs)
6mm	6-7	6-7
8mm	15-16	22-23
10mm	31-32	44-45
12mm	54-55	78-79
14mm	87-88	125-126

- x1** Driver/Left Tyger Access
- x1** Passenger/Right Tyger Access
- x1** Driver/Left Front Mounting Brackets [A]
- x1** Passenger/Right Front Mounting Brackets [C]
- x3** Driver/Left Mounting Brackets [B]
- x3** Passenger/Right Mounting Brackets [D]
- x16** 8mm Lock Washers
- x16** 8mm x 24mm OD x 2mm Flat Washers
- x16** 8-1.25mm x 30mm Hex Bolts
- x16** 8-1.25mm x 25mm Hex Combo Bolts


Parts List

Top View

ATTENTION: Refer to **D** and **P** labelling on the side of the tubes to determine Driver and Passenger TYGER Access

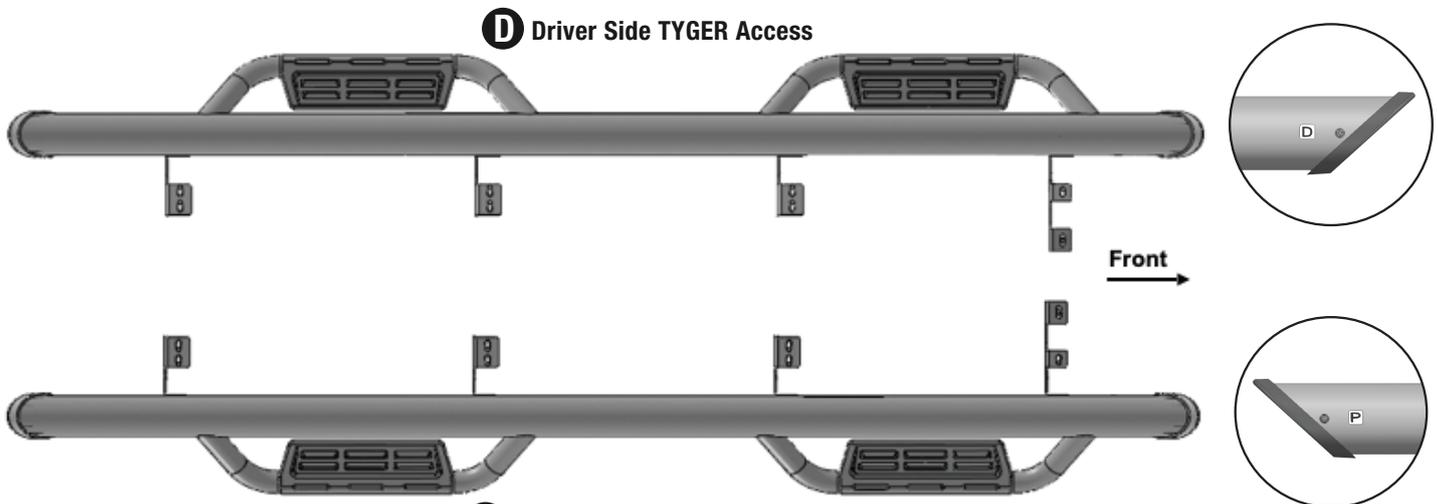


P Passenger Side TYGER Access

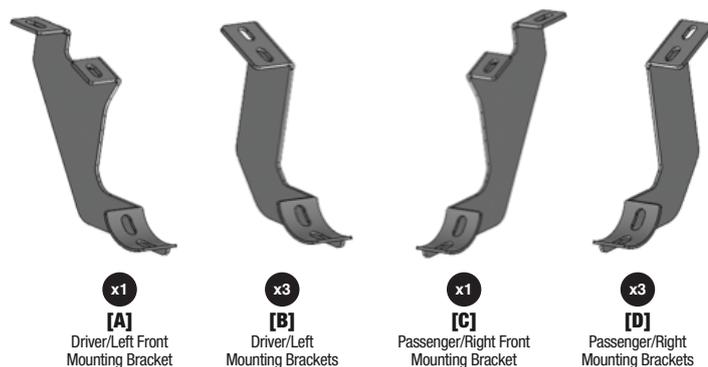

- x16** 8mm Lock Washers
- x16** 8-1.25mm x 30mm Hex Bolts
- x16** 8mm x 24mm OD x 2mm Flat Washers
- x16** 8-1.25mm x 25mm Hex Combo Bolts

Reference the letters printed on the brackets to determine mounting locations


D Driver Side TYGER Access

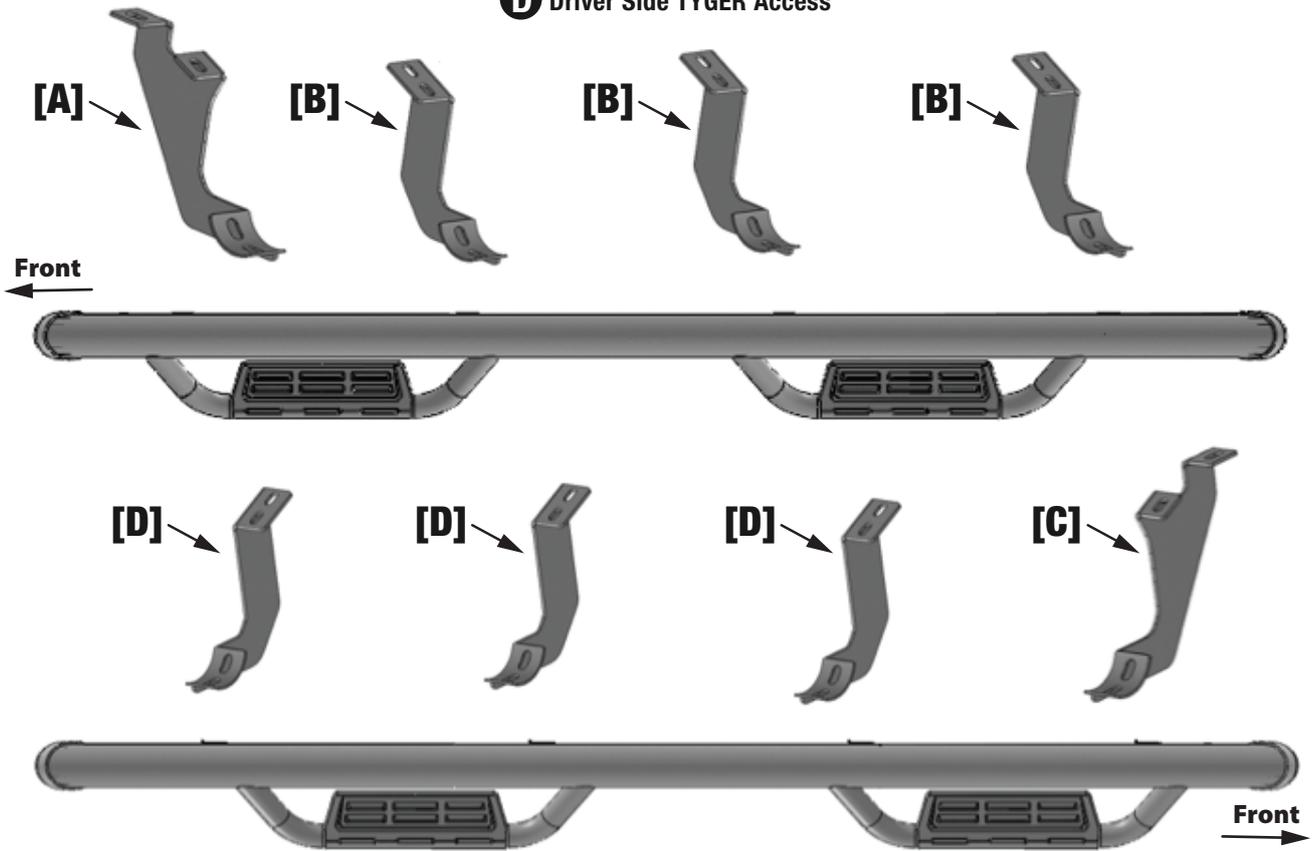

P Passenger Side TYGER Access


Bottom View

D Driver Side TYGER Access

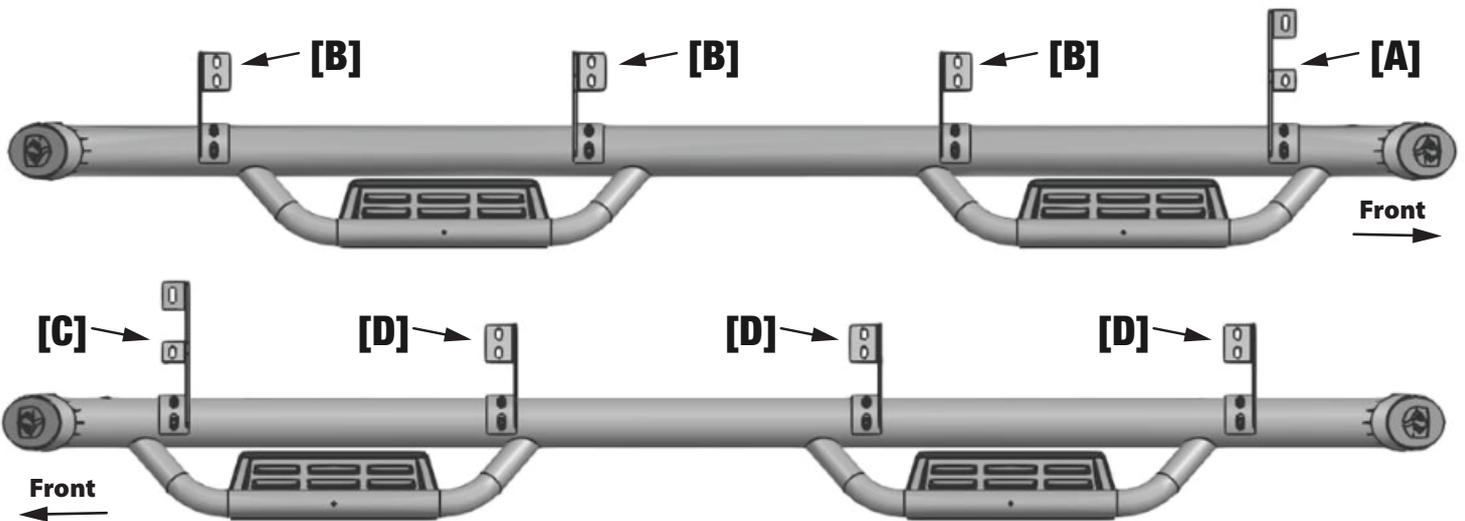


P Passenger Side TYGER Access

TOOLS REQUIRED



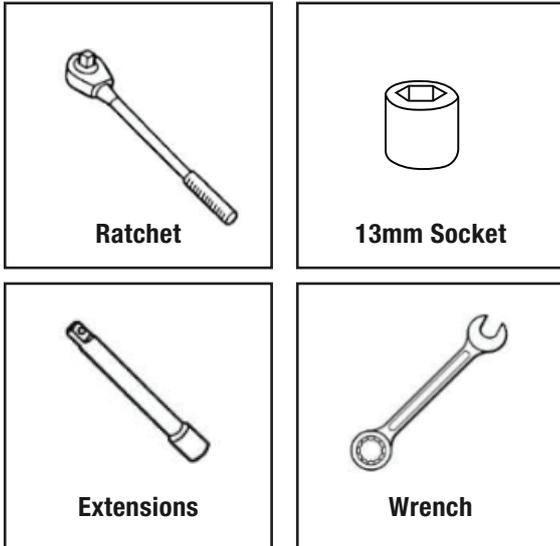


STEP 1 MOUNTING BRACKETS


Follow (Fig 1 – 7) to attach the brackets to the Passenger/Right Side. Ensure all hardware is hand tightened at this point.




Passenger-side Front Mounting Area

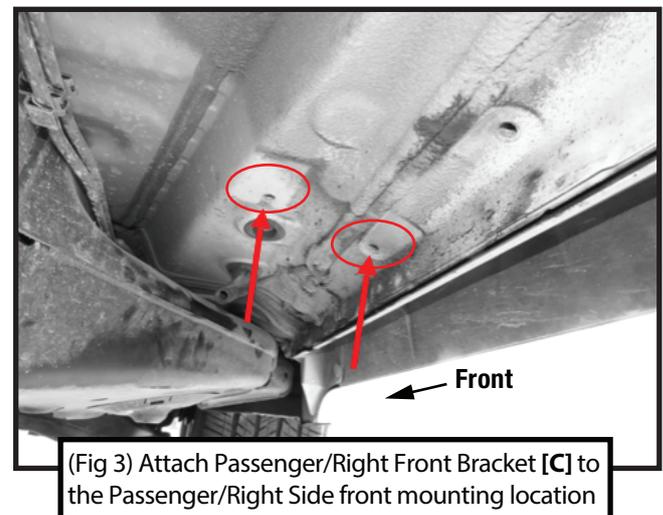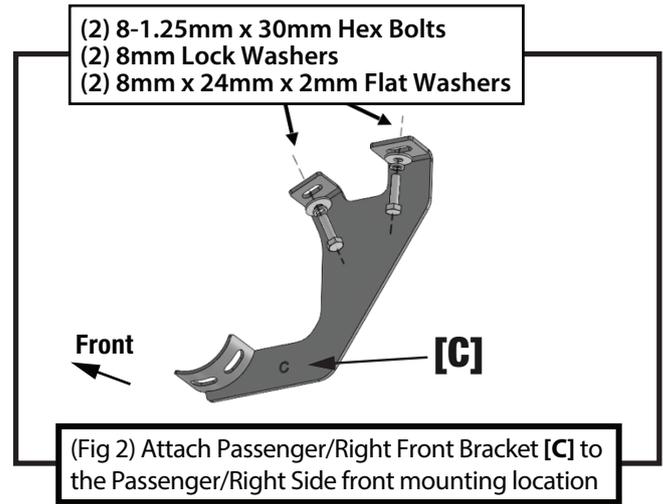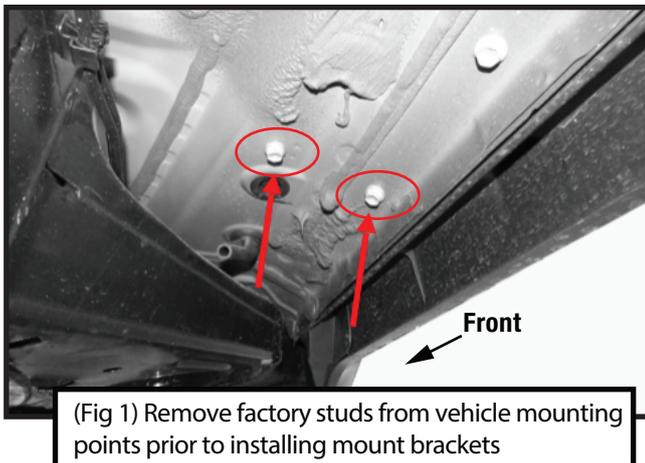


Passenger-side 2nd, 3rd, Rear Mounting Areas

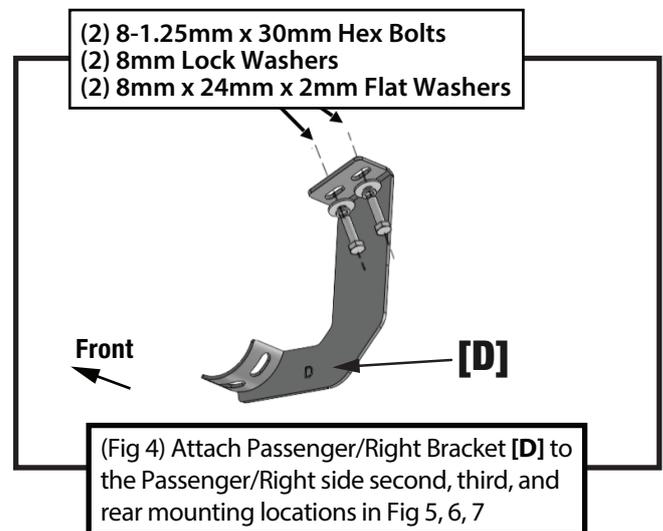


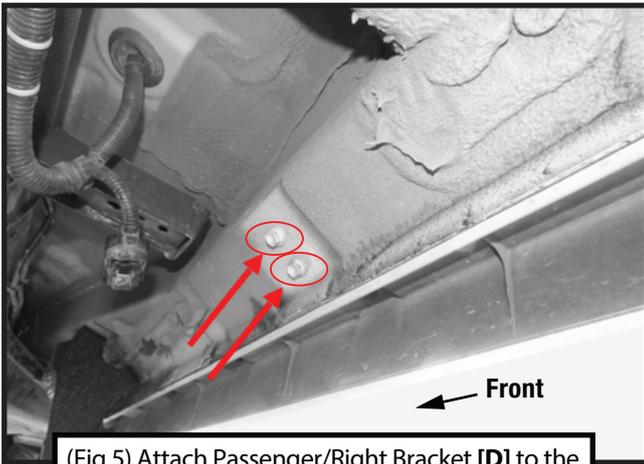

(Fig 5) Attach Passenger/Right Bracket [D] to the Passenger/Right side second mounting location (remove factory studs if necessary)

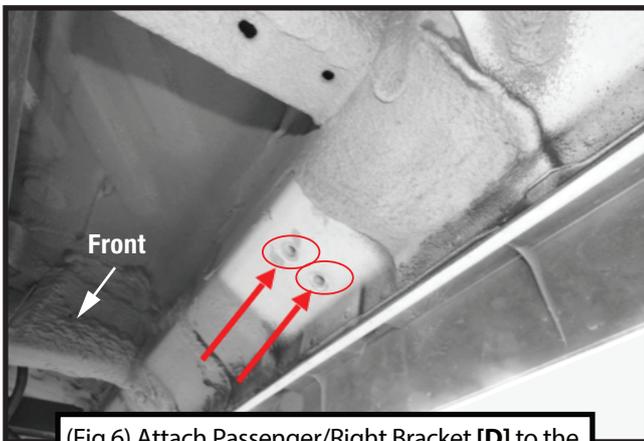


(Fig 6) Attach Passenger/Right Bracket [D] to the Passenger/Right side third mounting location

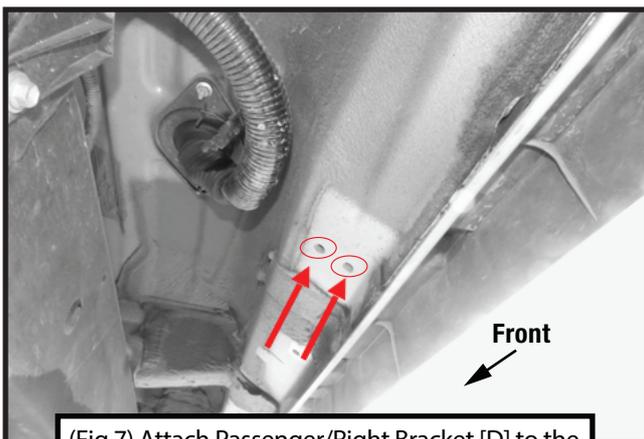

(Fig 7) Attach Passenger/Right Bracket [D] to the Passenger/Right side rear mounting location

STEP 2 MOUNTING RUNNING BOARD


Follow (Fig 8) to install the Tyger Access Drop Step on the Passenger/Right Mounting Brackets. Ensure all hardware is hand tightened at this point.

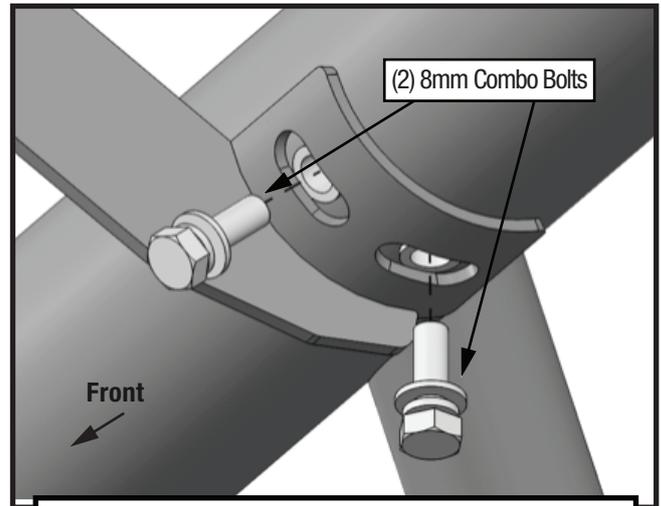

(Fig 8) Attach Passenger/Right Tyger Access Drop Step to Passenger/Right Mounting Brackets


STEP 3 DRIVER SIDE

Repeat **STEPS 1-2** for driver side installation. Use **Front Mounting Bracket [A]** instead of **[C]**; Use **2nd, 3rd and rear Mounting Brackets [B]** instead of **[D]**.



STEP 4

Ensure Tyger Access Drop Step is level and straightened, then tighten all fasteners. Installation is complete. Perform periodic inspections to the installation to make sure that all hardware is secure and tight.

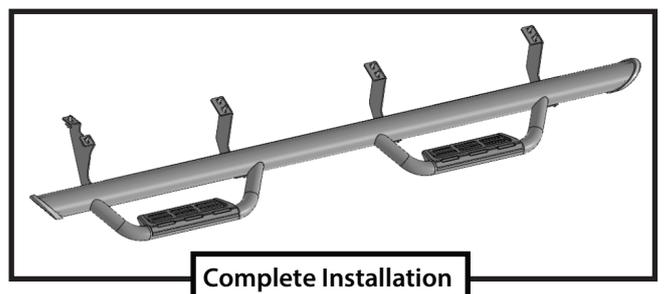

Complete Installation